




Buy on-line
at the FA Parkes
sales portal
the quickest
and most efficient
way to purchase
all your hardware
requirements; locks
handles, hinges
stays, gasketing
etc....

www.faparkes.co.uk
your one stop shop!



3/22387 with
plain bolt-pull

3/22388 'Nose-up' bolt allows
use on inward-opening doors

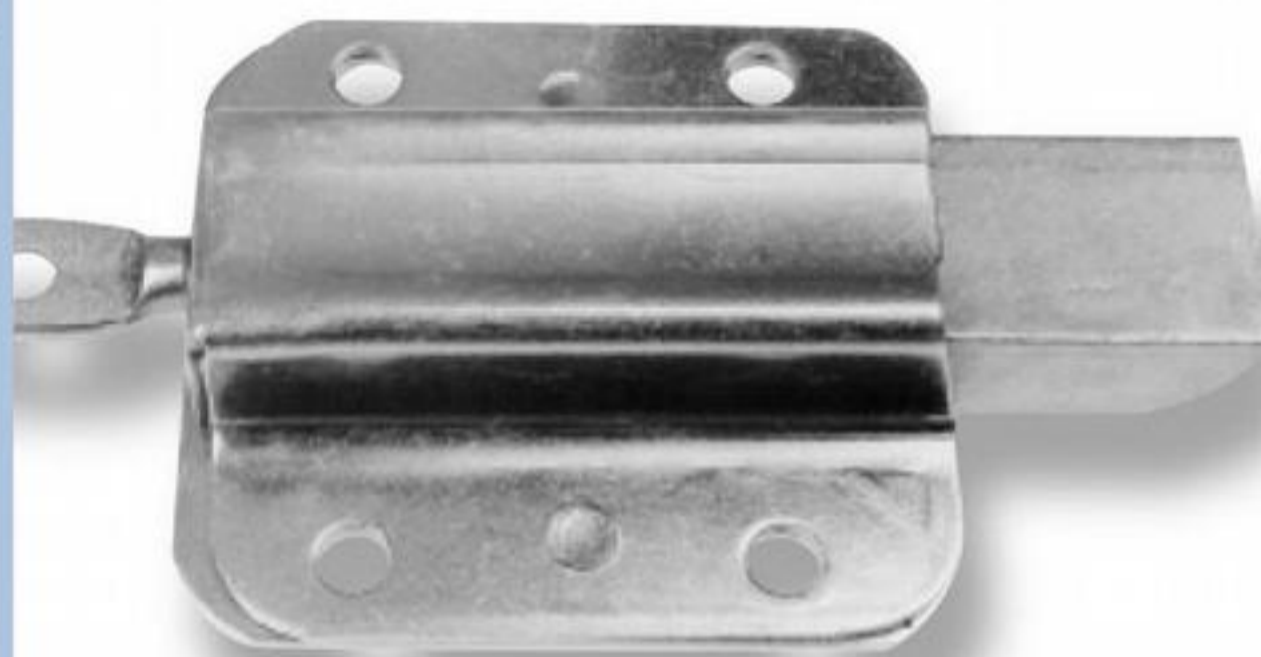

3/22386
with 'quick-fit'
attachment point

ORDERING CODE

3/22386	End latch, nose-down, 'quick-fit' pull
3/22387	End latch, nose-down, plain pull
3/22388	End latch, nose-up, plain pull
3/22389	End latch, nose-up, 'quick-fit' pull
3/22392	End latch, special (non-reversible)
9/01187	Stainless steel latch (as 3/22387)
3/22384	Packing plate

SPECIFICATION


A	Bolt Thickness	13 mm
B	Bolt Pull	13 mm
C	Width	57 mm
D	Bolt Width	19 mm
E	Body Length	62 mm
F	Hole Centres	44.5 mm
G	Hole Centres	33 mm
H	Hole Diameter	Ø 5.5 mm
J	Hole Diameter	Ø 5 mm

Bolt projection variable, 9-16 mm.

Minimum load 5kg for full bolt travel.


Mild steel model made in CR4.

Stainless models in grade 304 with stainless bolt-pull, bolt and spring.

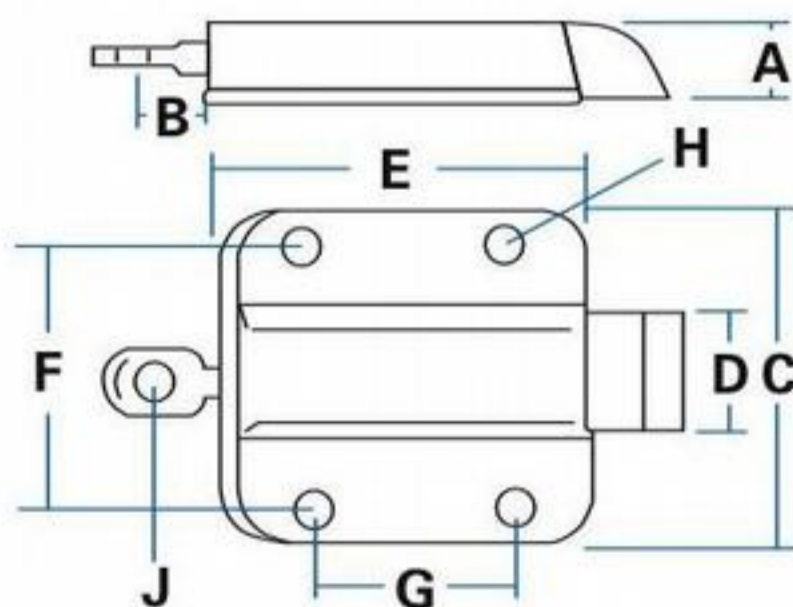

Detail of 'quick-fit' attachment.
The cropped rivet allows fast attachment of link bar as shown. A wave washer prevents rattle and excessive 'play'.

Suggested link bar 3/12497, length 915mm.
Linkage bar is pierced to accept rivet and allow 22mm free movement.

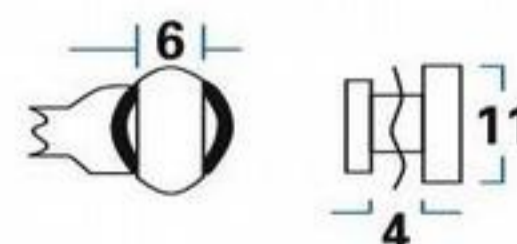

F.A. Parkes (M.B.F) Limited
Unit 4, Acorn Court
Butts Street, Leigh
Lancashire WN7 3AE

Tel. 01942 681 996
sales@faparkes.co.uk