


Buy on-line at the FA Parkes sales portal the quickest and most efficient way to purchase all your hardware requirements; locks handles, hinges stays, gasketing etc....

www.faparkes.co.uk your one stop shop!




Tel. 01942 681 996 sales@faparkes.co.uk

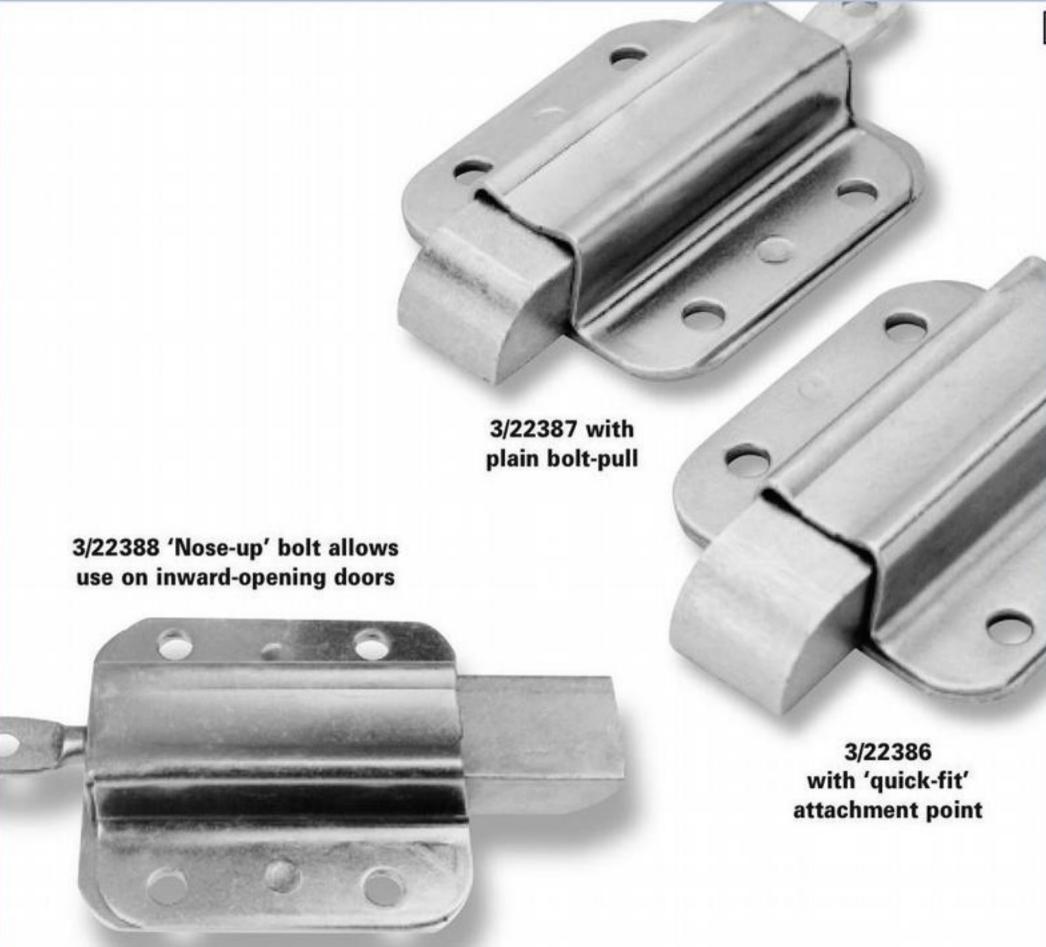

## **ORDERING CODE**

3/22386	End latch, nose-down, 'quick-fit' pul	
3/22387	End latch, nose-down, plain pull	
3/22388	End latch, nose-up, plain pull	
3/22389	End latch, nose-up, 'quick-fit' pull	
3/22392	End latch, special (non-reversible)	
9/01187	Stainless steel latch (as 3/22387)	
3/22384	Packing plate	

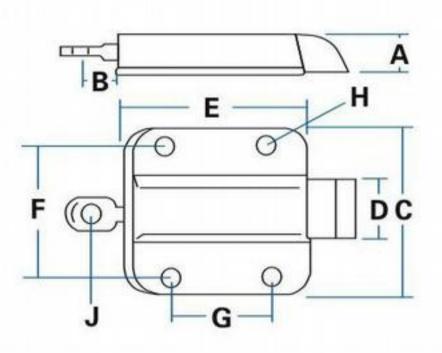

SPECIFICATION		
A	Bolt Thickness	13 mm
В	Bolt Pull	13 mm
C	Width	57 mm
D	Bolt Width	19 mm
E	Body Length	62 mm
F	Hole Centres	44.5 mm
G	Hole Centres	33 mm
Н	Hole Diameter	Ø 5.5 mm
J	Hole Diameter	Ø 5 mm

Bolt projection variable, 9-16 mm.

Minimum load 5kg for full bolt travel.

Mild steel model made in CR4.

Stainless models in grade 304 with stainless bolt-pull, bolt and spring.

Detail of 'quick-fit' attachment.

The cropped rivet allows fast attachment of link bar as shown. A wave washer prevents rattle and excessive 'play'.

Suggested link bar 3/12497, length 915mm.
Linkage bar is pierced to accept rivet
and allow 22mm free movement.

