


## 7-065 Swinghandle RS PrC

stainless steel AISI 316

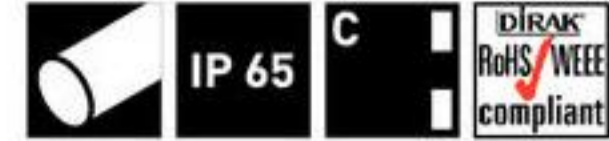

Swinghandle with 90° closing rotation.

- The Swinghandle can be locked with 40mm long Profile Cylinders (DIN 18252).
- RH or LH application.
- Water- and dust-tight according to IP65 DIN EN 60529.
- Detailed dimensions of the cutout PrC see page 04.5.
- The padlock device with rectangular base is fitted from the rear and so held captive between doorskin and swinghandle body.
- This opening can be filled with a rectangular blanking plate.

### Material:

- **Handle, door dish, dust cover, Swinghandle shaft, Padlock device, blanking plate, profile housing, snap cam, insert, 3- and 2-point cam, Round Rods, Adapter and Grounding / Earthing device:** stainless steel AISI 316
- **Cap and rod guide:** PA, black



For custom length rods as product system 7-106 the length L for rod control symmetrical doors (as drawn) is:

$$L = \frac{\text{upper rod clearance} - 12\text{mm}(0.472)}{2(0.079)} - 50\text{mm}(1.969) \quad L = \frac{\text{lower rod clearance} - 12\text{mm}(0.472)}{2(0.079)} + 50\text{mm}(1.969)$$

For custom length rods as product system 7-106 the length L for rod control at the door center is:

$$L = \frac{\text{clearance} - 12\text{mm}(0.472)}{2(0.079)}$$

Swinghandle for Profile Cylinders to DIN 18252		without cylinder dustcover	with cylinder dustcover	see page
a) Swinghandle for profile cylinder 40mm long		207-9294	207-9295	
a1) Blanking plate for opening (optional)		207-2506.80	207-2506.80	
a2) Swinghandle for padlock		107-9284	107-9285	
b) Profile cylinder with insert				
Square 6		211-9226	211-9226	
Square 7		211-9227	211-9227	
Square 8		211-9228	211-9228	
Triangular 7		211-9229	211-9229	
Triangular 8		211-9230	211-9230	
Double bit 3 pin		211-9231	211-9231	
Double bit 5 pin		211-9232	211-9232	
Slotted 2x4 deep		211-9233	211-9233	
Security insert with triangular 8		211-9242*	211-9242*	10.36
Additional profile cylinder				03.34, 10.36
c) 3-point cam for bending	A20	207-9845-22	207-9845-22	
	A26	207-9845-28	207-9845-28	
c1) 2-point cam		207-9598	207-9598	
Other dimensions of cams on request.				
d) Round Rod (the table above)				10.12, 10.38
e) Adapter for round rods		200-9603	200-9603	
f) Rod Guide for bending	A20	200-3601.03	200-3601.03	
Rod Guide for bending	A26	200-3602.03	200-3602.03	
g) Grounding/Earthing clip:		208-1201.04	208-1201.04	04.40
* Price and delivery time on request				

### 7-065 Swinghandle RS PrC

stainless steel AISI 316

