

2-340 Rod-Latch (bolt type) RS

for Swinghandle




Swinghandle and dual cylinder
Swinghandle with Rod-Latch for
bending A=25mm / 0.984 or for door-
thicknesses from 16 to 22 mm / 0.630 to
0.866.

- Rod-Latch, heavy duty application
with 90° stroke.

Material:

- a) to a3)
- **Swinghandle:**
PA, black or zinc die, black
- **Dish:**
PA, black

- b)
- **Swinghandle:**
PA, black
- **Dish:**
PA, black
- c)
- **Rod-Latch:**
steel, zinc plated
- d)
- **Lock support:**
steel, zinc plated
- e)
- **Round rod:**
steel, zinc plated

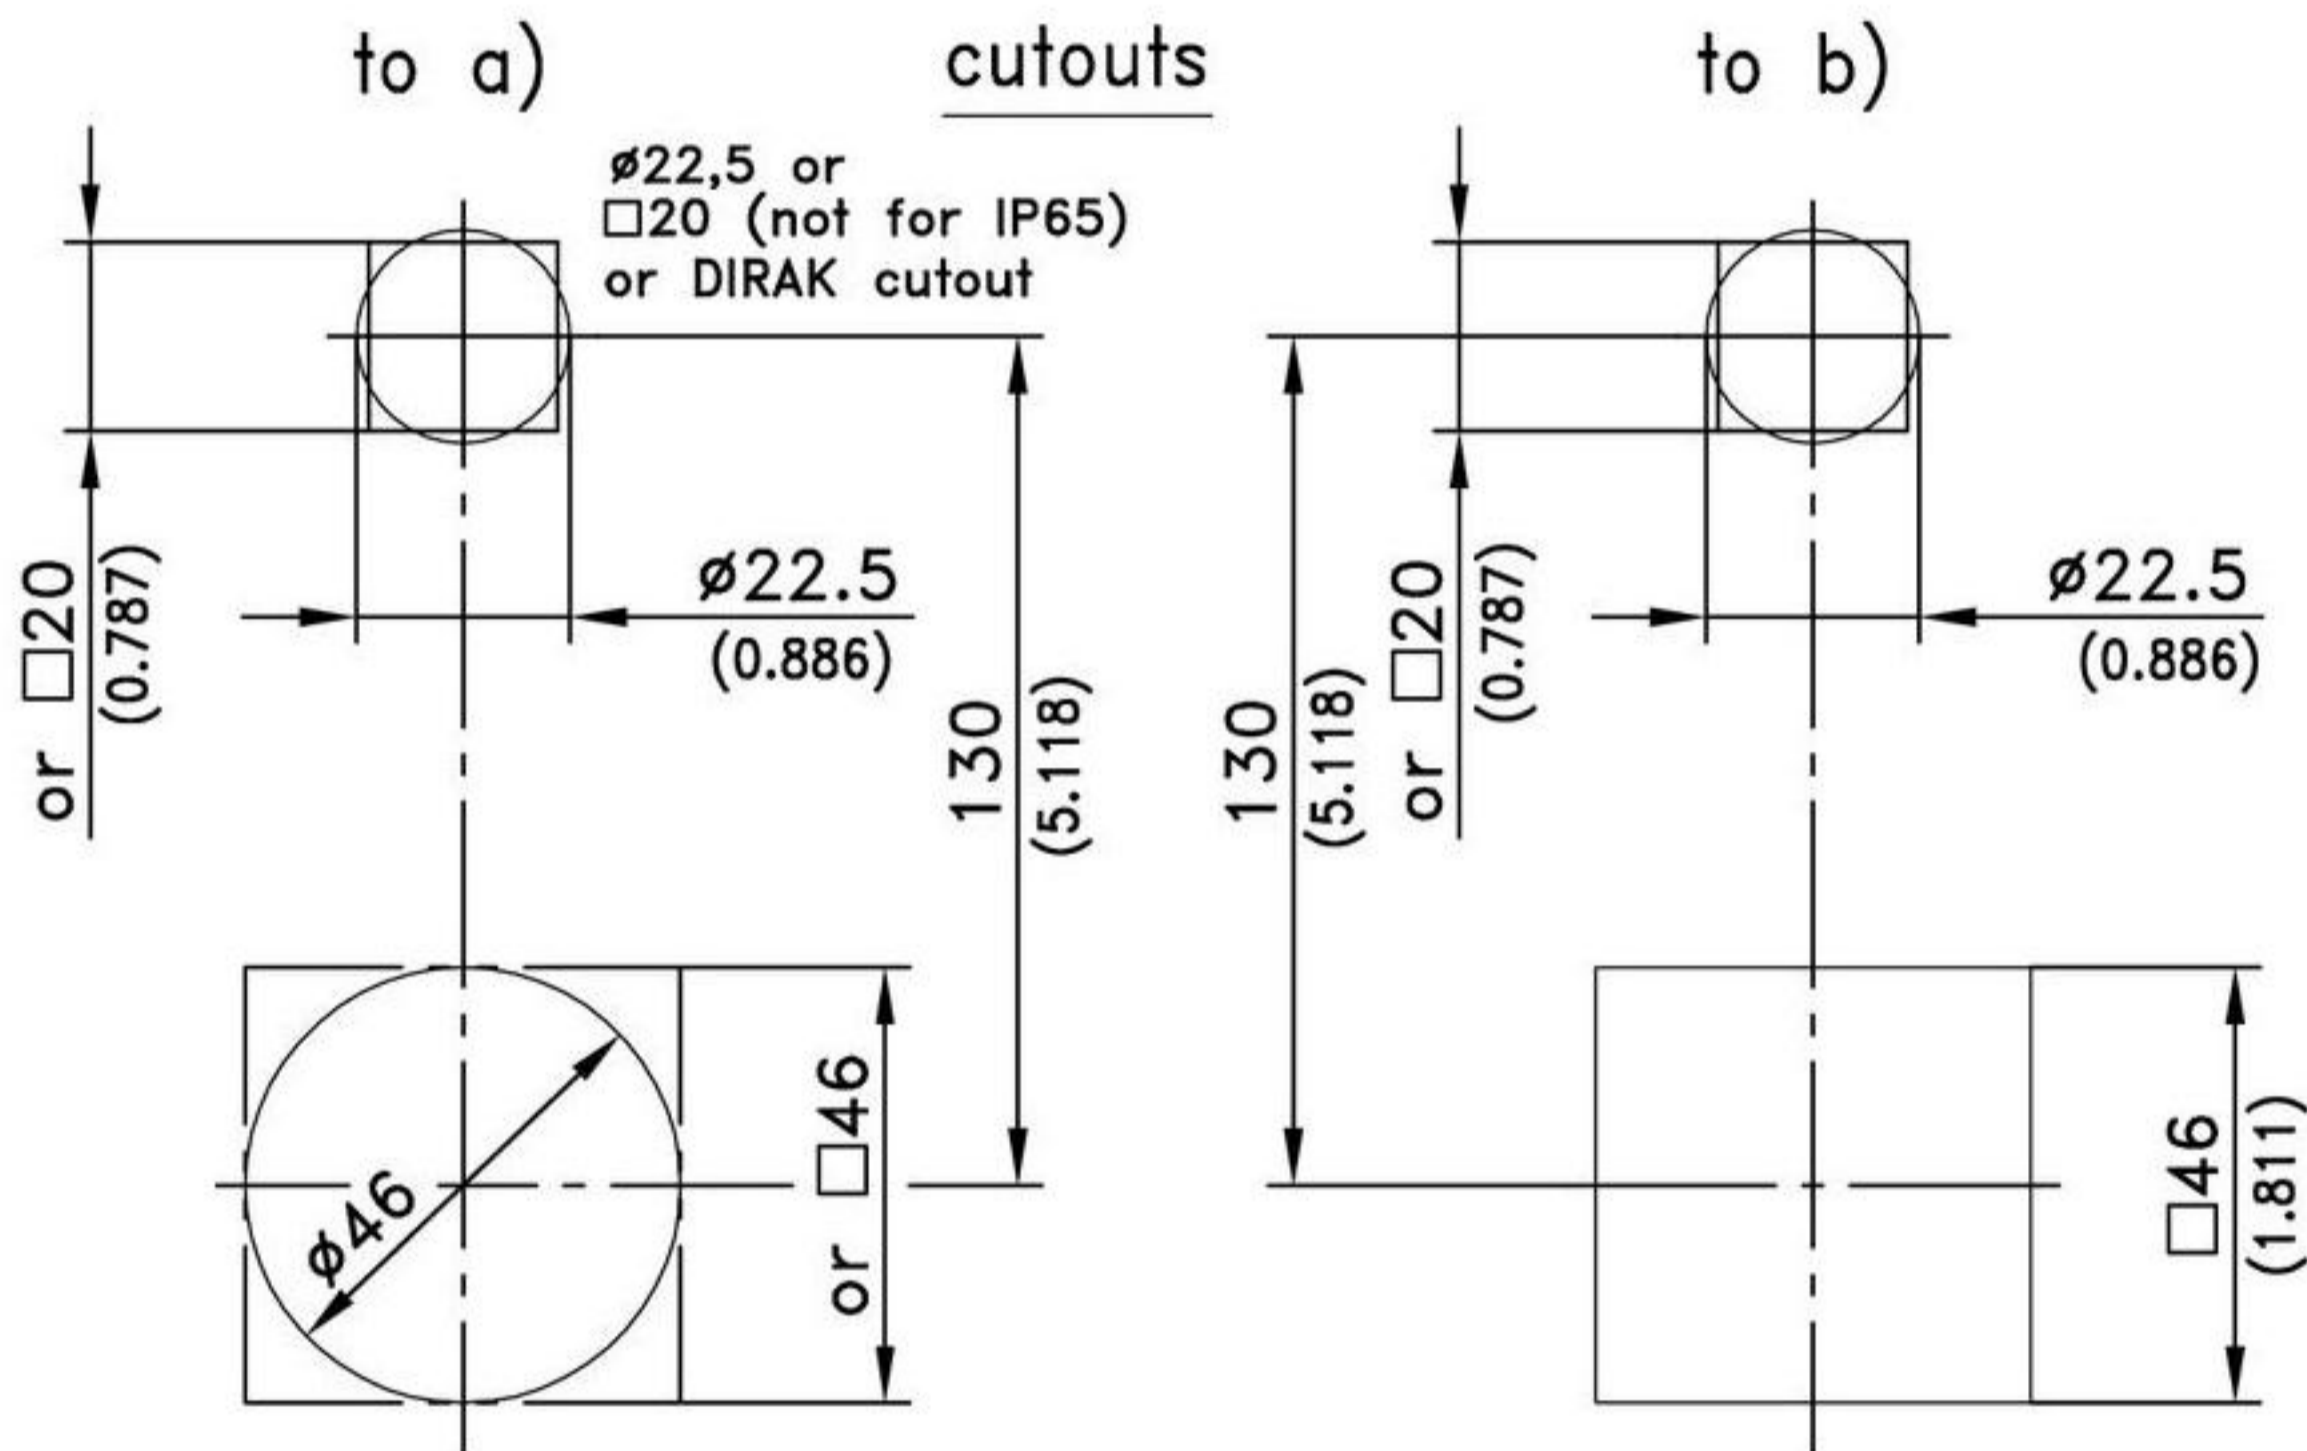

	Cutout 130/Ø46	Cutout 130/□46	see page
a) Swinghandle, PA black for Profile Cylinder 40mm long	207-9056	207-9319	
a1) as a), but with cylinder dustcover, sealable	207-9057	207-9320	
a2) as a1), but 5mm raised for profile cylinder 45mm long	207-9058	207-9321	
a3) as a2), but handle, zinc die (black), dish, PA black	207-9059	207-9322	
All versions a) with □46 are interchangeable with all versions b).			
b) Dual Cylinder Swinghandle, zinc die	-	on request	
For further details			03.28, 03.29
c) Rod-Latch with rod connection	M8	M8	
version	RH	LH	
	238-9003	238-9004	
e) Round rod with 30mm thread Ø8x1000mm long with M8	201.0801.00-01000	201.0801.00-01000	
c) Rod-Latch with rod connection	M10	M10	
version	RH	LH	
	238-9001	238-9002	
e) Round rod with 30mm thread Ø10x1000mm long with M10	201-1001.00-01000	201-1001.00-01000	
d) Lock support RH/LH, 16mm high	238-1501	238-1501	
f) Profile cylinder			03.34
g) Application with housing / insert			02.26, 02.34, 10.18

2-340 Rod-Latch (bolt type) RS

for Swinghandle

