

4-182.06SL Hinge Pr05 SNAP-LINE 180°

Bending 25mm for surface mounted door, frame part: snap-in, door part: screw-on.




180° SNAP-LINE hinge.

- Door is lift-off.
- Frame-part with D-SNAP technology, door part screw-in.
- RH and LH application.
- The installation of the frame part, with already pre-fitted pin-halves, is achieved by a simple push into the appropriate cutout.
- After retracting the pin-halves, the door can be pulled out horizontally at about 30° door opening.
- Special wire springs, fitted into the door part, make the pin-halves captive and the pin-halves have a detent in both positions.

- Removing of the door: please refer to page 01.83.
- Uninstallation of the hinge: please refer to page 01.79.
- Water and dust tight according to IP65 DIN EN 60529 by using the O-ring (not included).

Material:

- **Frame part, door part and pin:** zinc die, black
- **Snap wedges:** sintered metal, plated
- **Detent spring:** spring steel

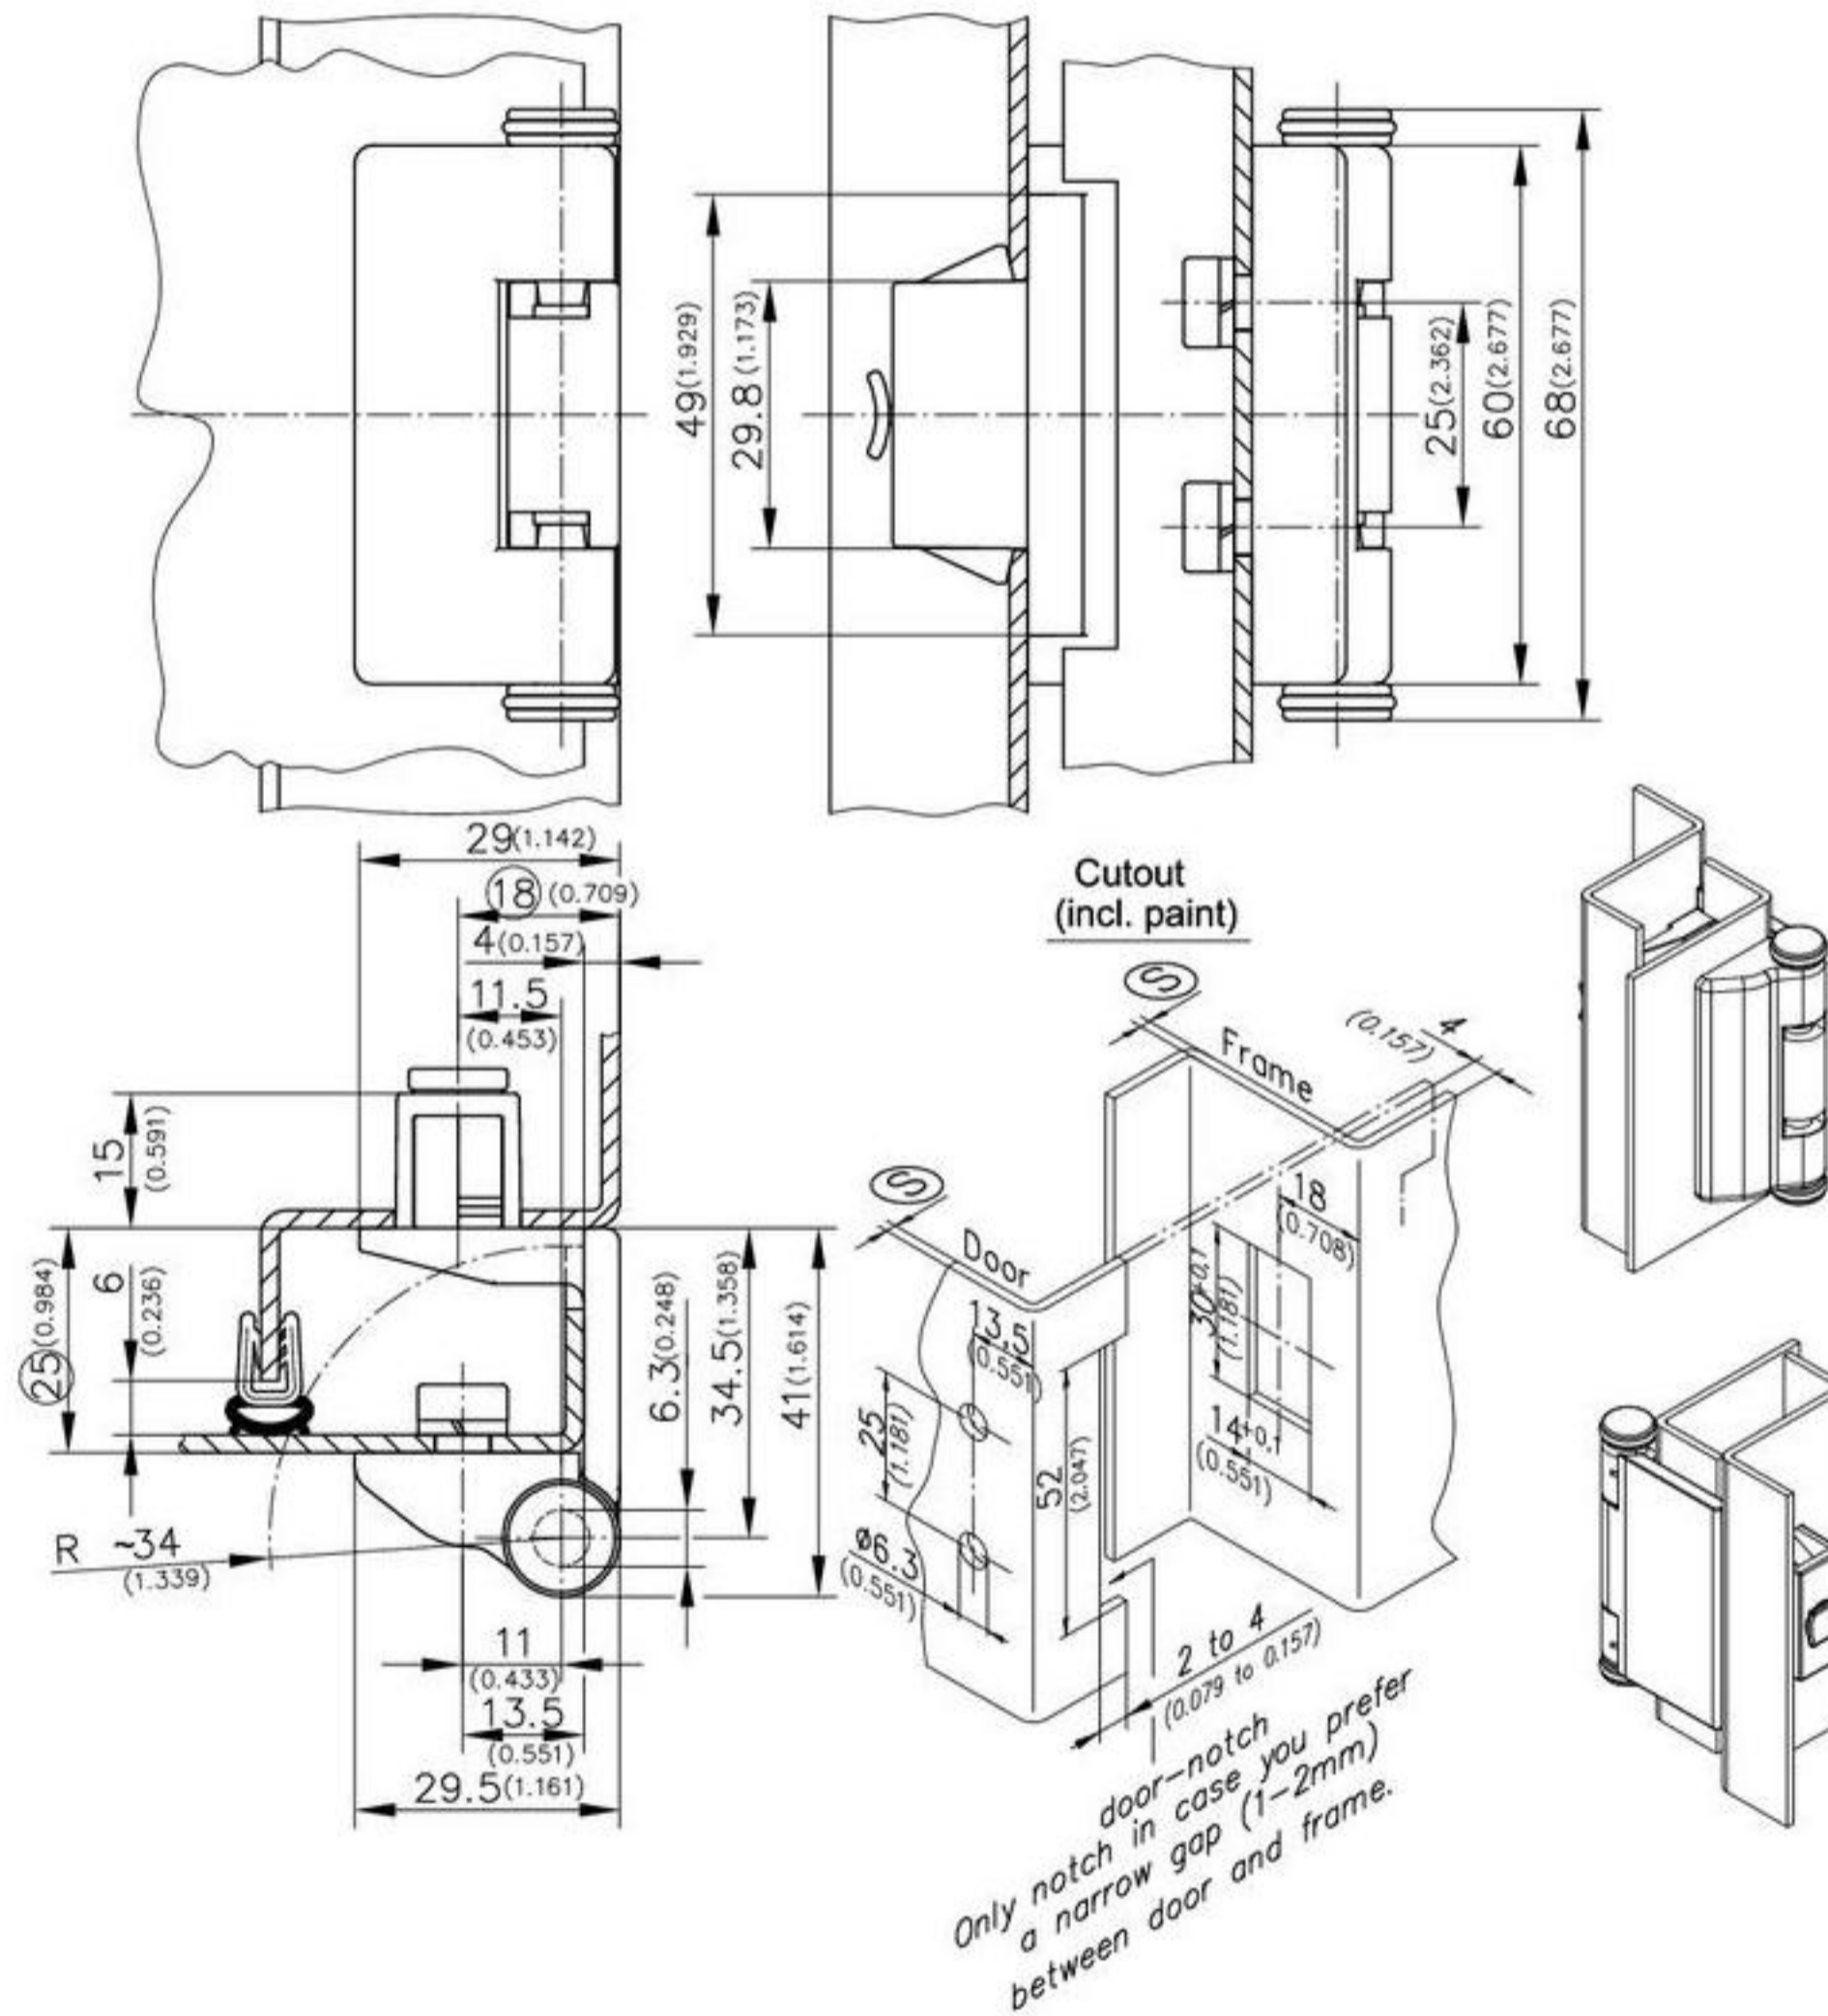

	clamping range ©	Part No.	see page
Hinge	1,2 - 1,7	412-9062.00-00015	
	1,7 - 2,2	412-9062.00-00020	
	2,2 - 2,7	412-9062.00-00025	
	2,7 - 3,2	412-9062.00-00030	
	3,2 - 3,7	412-9062.00-00035	
O-ring		200-1005.00-02420	
Cover for cutout 30x14		292-0402.00-03014	01.106
Reinforcement plate for thin-walled sheets and for higher loads:		292-0701.15-01530	01.108
Tool for uninstallation		292-0306.80-02530	01.109
or		292-0301.15-00000	01.109