

1-150 Quarter-Turn with Handle Pr20.1 L18

with cylinder




L-Handle, RH or LH application

- Water- and dust-tight according to IP65 DIN EN 60529.
- The Quarter-Turn consists of two basic components which can be combined to suit your application.
- On request parts can be assembled by DIRAK.
- A pre-assembled Quarter-Turn can be installed in the cutout.

Material:

- a)
 - **L-handle**
PA, black with zinc die core or zinc die, chrome plated or black coated
 - b)
- **Cam:**
steel, zinc plated

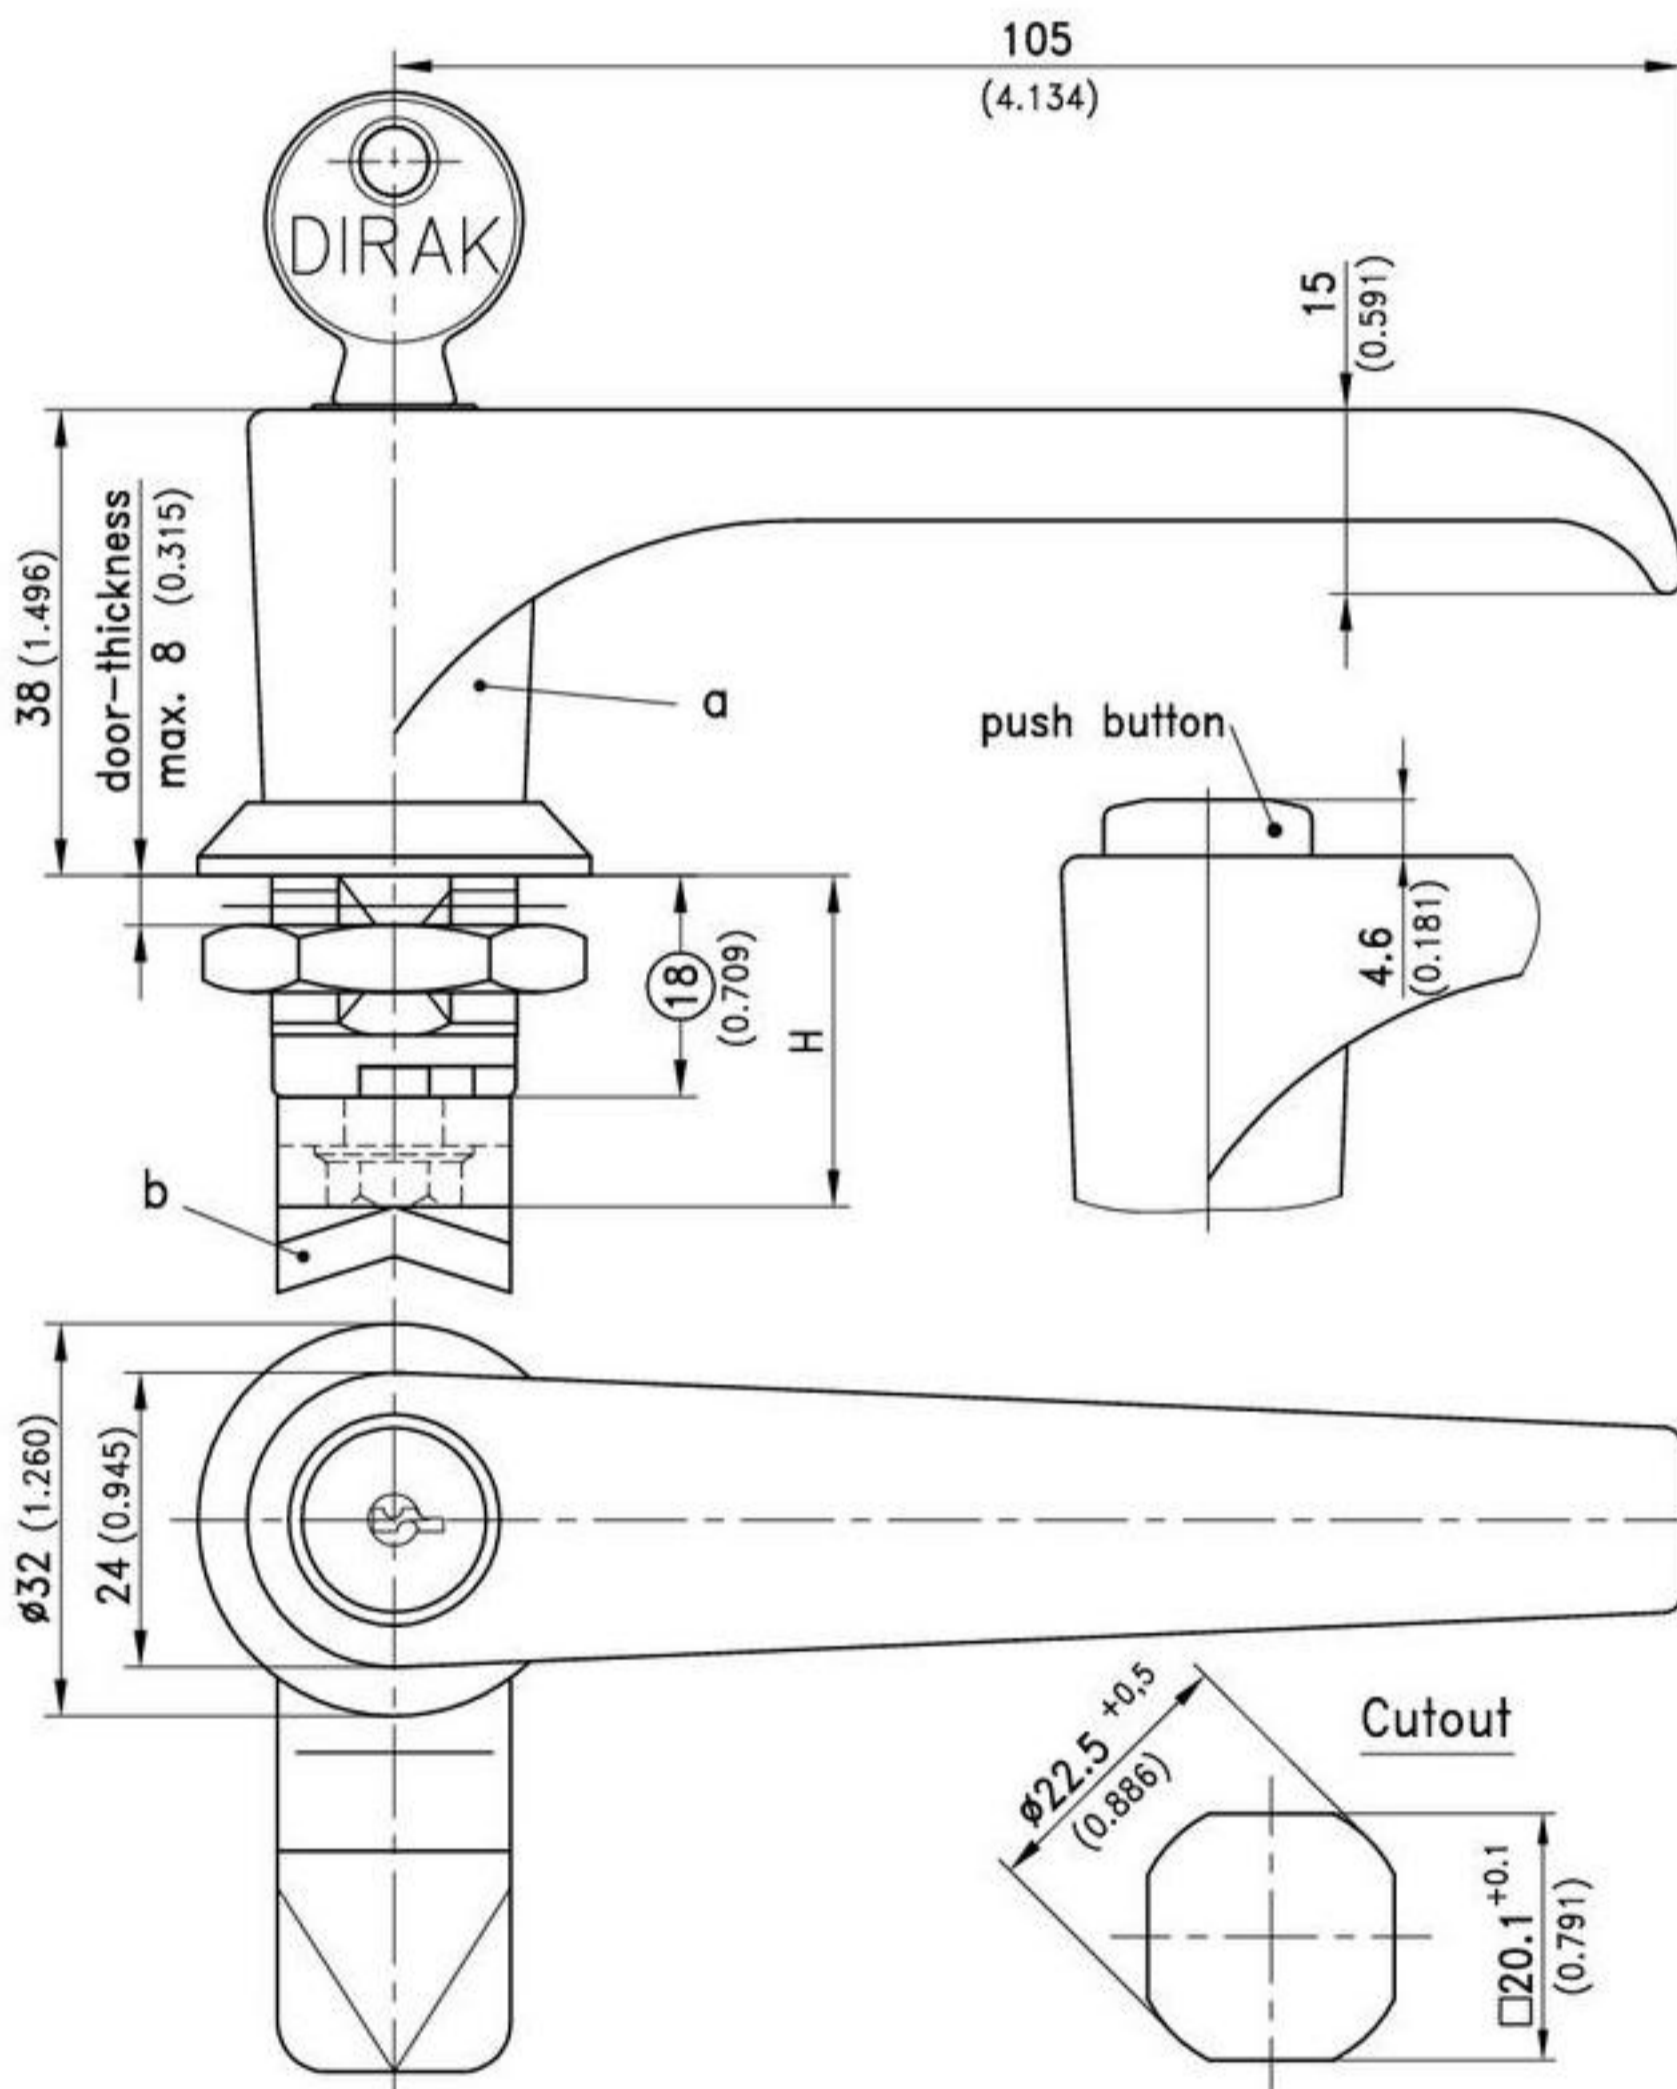

a) L-Handle with plain grounding/earthing nut	PA black, with zinc die core	zinc die, chrome plated	zinc die, black	see page
non locking	200-9401	200-9419	200-9427	
keyed alike DIRAK 1333*	200-9402	200-9420	200-9428	
keyed alike DS200*	500-9402	500-9420	500-9428	
keyed different/mixed	200-9403	200-9437	200-9438	
PAGODA keyed alike	-	501-9420	501-9428	
PAGODA keyed different/mixed	-	501-9437	501-9438	
Push button	200-9483	-	-	
b) Cam/3-point cam				02.26, 02.58

Optional:

c) Assembling	200-0001	200-0001	200-0001
Assembling for right door	200-0019	200-0019	200-0019
Assembling for left door	200-0020	200-0020	200-0020

All lockable handles supplied with two keys.

* with stainless dust-shutter