


**Continuous plastic hinge in 15,25 meter rolls**

Technical features :

- Temperatures: -40°C up to +80°C
- Can be fixed with: rivets, screws, nails or clamps
- Chemical resistance : oil, solvents, sea water and most chemical agents
- Tensile resistance : 180N/cm
- Material offers excellent fatigue resistance

B	C	material	finish	part number	weight
28.6	3.2	polypropylene	white	44-7-3000	1050g
28.6	3.2	polypropylene	grey	44-7-3001	1050g
28.6	3.2	polypropylene	black	44-7-3002	1050g
38.1	3.2	polypropylene	white	44-7-3003	1450g
38.1	3.2	polypropylene	grey	44-7-3004	1450g
38.1	3.2	polypropylene	black	44-7-3005	1450g
50.8	3.2	polypropylene	white	44-7-3006	2300g
50.8	3.2	polypropylene	grey	44-7-3007	2300g
50.8	3.2	polypropylene	black	44-7-3008	2300g
76.2	3.2	polypropylene	white	44-7-3009	2900g
76.2	3.2	polypropylene	grey	44-7-3010	2900g
76.2	3.2	polypropylene	black	44-7-3011	2900g

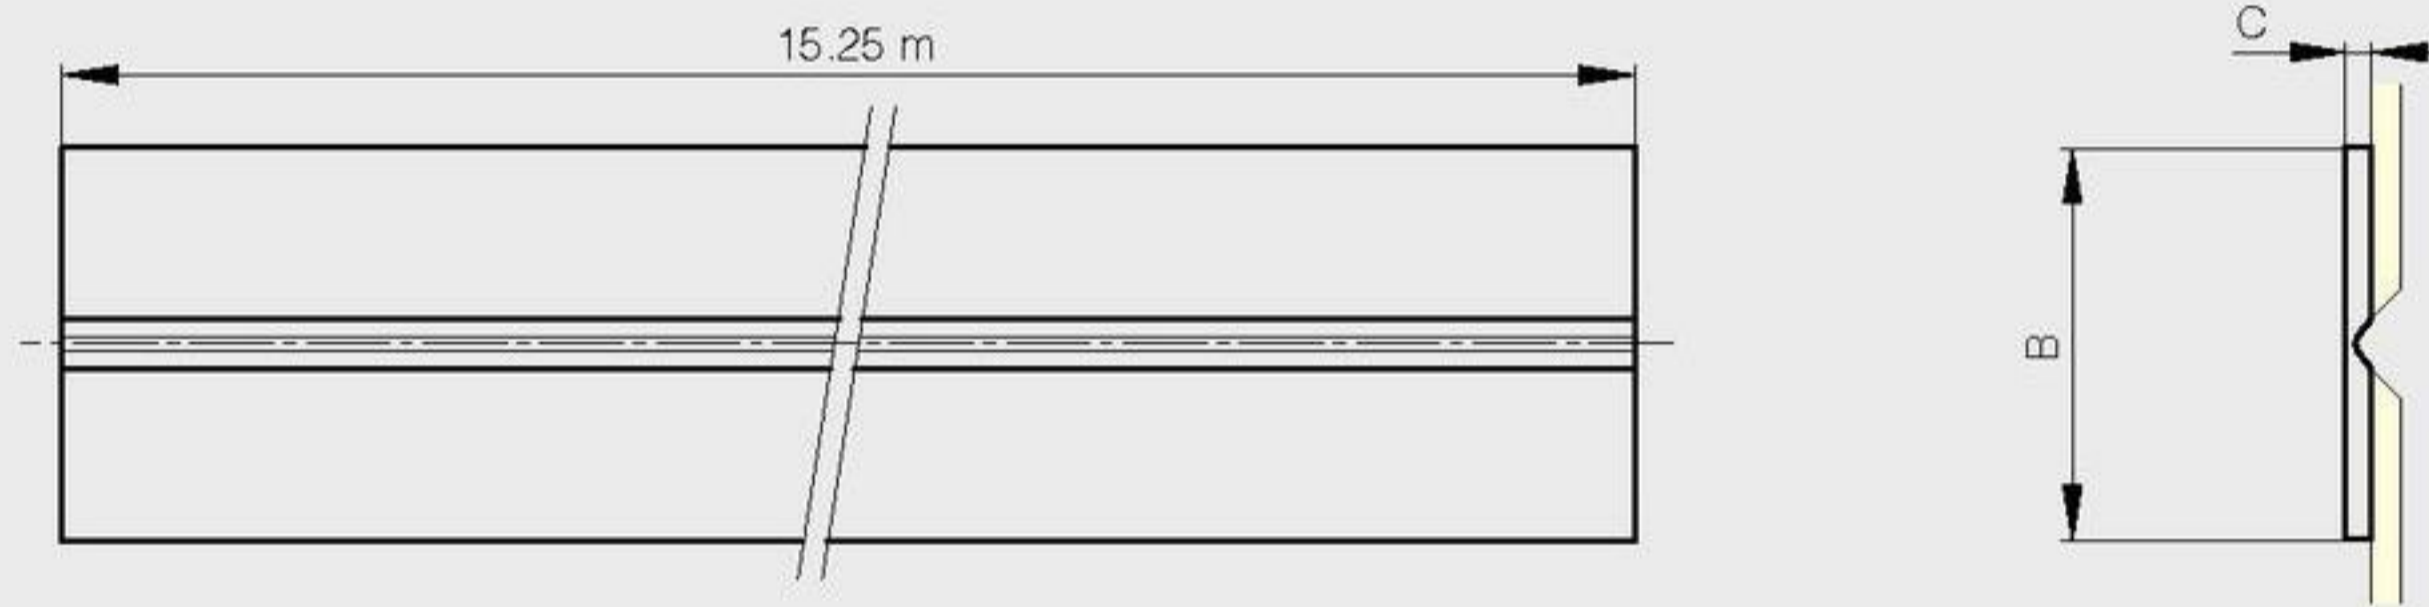

**Rolled knuckle continuous hinges «Imperial» dimension**

A	B	C	D	E	note	material	finish	part number	weight
6"	1"	0.04"	0.08"	5/8"	undrilled	304 stainless steel	raw	42-1-4096	500g
6"	1" 1/4	0.04"	0.08"	5/8"	undrilled	304 stainless steel	raw	42-1-4089	500g
6"	1" 1/4	3/64"	1/8"	3/4"	undrilled	304 stainless steel	raw	42-1-4346	790g
6"	1" 1/2	3/64"	1/8"	3/4"	undrilled	304 stainless steel	raw	42-1-4347	940g
6"	2"	3/64"	1/8"	3/4"	undrilled	304 stainless steel	raw	42-1-4348	1100g
6"	2"	1/16"	5/32"	5/8"	undrilled	304 stainless steel	raw	42-1-4219	1500g
7"	2" 1/4	1/16"	5/32"	5/8"	undrilled	304 stainless steel	raw	42-1-4220	2000g
6"	2" 1/2	1/16"	5/32"	5/8"	undrilled	304 stainless steel	raw	42-1-4221	1800g
6"	2" 3/4	1/16"	5/32"	5/8"	undrilled	304 stainless steel	raw	42-1-4097	1900g
7"	3"	1/16"	5/32"	5/8"	undrilled	304 stainless steel	raw	42-1-4094	2400g
7"	5"	0.08"	1/4"	1"1/4	undrilled	304 stainless steel	raw	42-1-4095	5000g

